




# ENGINEERING CHEMISTRY FOR ELECTRICAL SCIENCES

Submitted by
R.SRILEKHA,A.P/Department of chemistry
SNS COLLEGE OF TECHNOLOGY
UNIT-1 ELECTROCHEMISTRY



# **ELECTROCHEMISTRY**



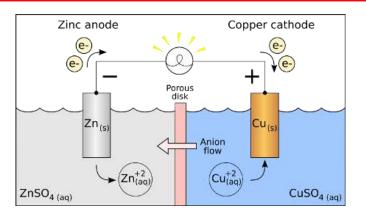

#### INTRODUCTION

Electrochemistry is a branch of chemistry <u>deals with the chemical</u> <u>applications of electricity.</u> It deals with the chemical reaction produced by passing electric current through an electrolyte or the production of electric current through chemical reactions.

The science of electrochemistry deals with the study of interconversion of electrical and chemical energy.

The principle of electrochemical cell deals with the conversion of energy from electrical to chemical and vice versa.





#### **1.CURRENT:**

It is the flow of electrons through a conductor.

#### **2.CONDUCTORS**:

A substance that allows electric current to pass through it called a conductor.

The ability of a material to conduct electric current is called conductors.

Eg: All metals, graphite, aqueous solution of acids, bases etc..,

#### **3.NON CONDUCTORS:**

Materials which do not conduct electric current is called non conductors.

Eg: Plactics, wood etc..,



# TYPES OF CONDUCTORS



#### 1.Metallic conductor

# 2. Electrolytic conductor

# **Metallic conductors:**

Metallic conductors are solid substance which conduct electric current due to the movement of electrons from one end to another.

Eg: All metals, graphite.

# **Electrolytic conductors:**

Electrolytic conductors conduct electric current due to the movement of ions in solution or in fused state. The conduction increases with increase of temperature.

Eg: Acids, bases, salts, etc..,



#### **METALLIC CONDUCTION**

- It involves the flow of electrons in a conductor.
- Conduction decreases with increase in temperature.
- It does not involve any transfer of matter.
- No change in the chemical properties of the conductor.

#### **ELECROLYTIC CONDUCTION**

- It involves the movement of ions in a solution.
- Conduction increases with increase in temperature.
- It involves the transfer of electrolyte in the form of ions.
- Chemical reactions occurs at the two electrodes.



# TYPES OF ELECTROLYTIC CONDUCTORS:



The electrolytic conductors are further classified into three types

#### a. Strong electrolytes:

Strong electrolytes are substance which ionise completely almost at all dilutions.

Eg: HCl, NaCl, NaOH etc..,

#### **b.** Weak electrolytes:

Weak electrolytes are substance which ionize to a small extent even at high dilutions.

Eg: CaCo3, NH4OH, etc..,

#### c. Non electrolytes:

Non electrolytes are substance which do not ionize at any solutions.

Eg: Glucose, Sugar, Alcohol, etc..,



#### IMPORTANT CELL TERMINOLOGY



- Oxidation: The tendency to lose electrons.
- Reduction: The tendency to gain electrons.
- Electrode: When a metal rod is dipped in its salt solution, it develops a positive or negative potential. This assembly is called electrode.
- Anode: Anode is a electrode at which oxidation occurs.
- Cathode: Cathode is a electrode at which reduction occurs.
- Electrolytes: Electrolyte is a water soluble substance forming ions in the solution and conduct an electric current.
- Half cell: Each half cell is a electrochemical cell where oxidation occurs and the half where the reduction occurs is called half cell.
- Cell: Cell is a device consisting of two half cell. The two half cells are conneted through the wire.



# **TYPES OF CELLS**



Based on the type of reaction occurring in a cell, cells are classified into two types

# 1.Electrolytic cells

Electrolytic cells are the cells in which electrical energy is used to bring about a chemical reaction. Eg: Electroplating etc..,

# 2.Electrochemical cells

Electrochemical cells are the cells in which chemical energy is converted into electrical energy. Eg:Daniel cell.



### REPRESENTATION OF A CELL



We will consider that a cell consists of two half cells .Each half cell is again made of a metal electrode in contact with metal ion in the solution.

1.A single vertical line(|) represents a phase boundary between metal electrode and ion solution (electrolyte). Thus the two half cell in voltaic cell are indicated as

Zn|Zn2+ boundary) Cu2+|Cu

(|-phase

Anode half cell

Cathode half cell

The metal electrode in <u>anode</u> half cell is on the <u>left</u>, while in <u>cathode</u> half cell is on the <u>right</u> of the metal ion.





# 2.In the complete cell diagram, the two half cells are separated by a double vertical line in between zinc —copper cell can be written as Zn|Zn2+ || Cu2+|Cu (||-Salt bridge)

3. The symbol for an inert electrode like the platinum electrode is often enclosed in a bracket.

Mg|Mg2+||H+|H2(pt)

**Anode electrode** 

cathode electrode

(pt)-inert electrode



# EMF OF A CELL



Electromotive force is defined as the difference of potential which cause flow of current of current from one electrode of higher potential to the other electrode of lower potential.

Thus the emf of a galvanic cell can be calculated using the following relationship.

EMF={standard reduction potential of - {standard reduction right hand side electrode} potential of left hand side electrode}

electrode}

#### **FACTORS AFFECTING EMF OF A CELL:**

- 1. Nature of the electrolyte and electrodes.
- 2.Concentration and composition of the electrolytes.
- 3.PH and temperature of the solution.