



The University of New Mexico

Shading II

Ed Angel

Professor Emeritus of Computer Science

University of New Mexico



The University of New Mexico

Objectives

- Continue discussion of shading
- Introduce modified Phong model
- Consider computation of required vectors



Ambient Light

- Ambient light is the result of multiple interactions between (large) light sources and the objects in the environment
- Amount and color depend on both the color of the light(s) and the material properties of the object
- Add $k_a I_a$ to diffuse and specular terms


reflection coef

intensity of ambient light



Distance Terms

- The light from a point source that reaches a surface is inversely proportional to the square of the distance between them
- We can add a factor of the form $1/(ad + bd + cd^2)$ to the diffuse and specular terms
- The constant and linear terms soften the effect of the point source

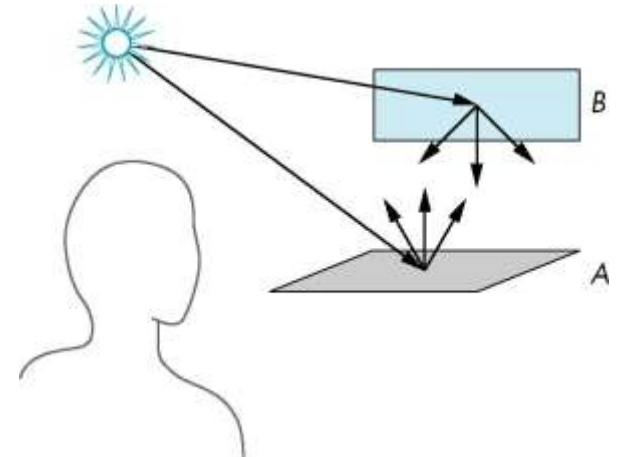



Light Sources

- In the Phong Model, we add the results from each light source
- Each light source has separate diffuse, specular, and ambient terms to allow for maximum flexibility even though this form does not have a physical justification
- Separate red, green and blue components
- Hence, 9 coefficients for each point source
 - $I_{dr}, I_{dg}, I_{db}, I_{sr}, I_{sg}, I_{sb}, I_{ar}, I_{ag}, I_{ab}$



Material Properties

- Material properties match light source properties
 - Nine absorption coefficients
 - k_{dr} , k_{dg} , k_{db} , k_{sr} , k_{sg} , k_{sb} , k_{ar} , k_{ag} , k_{ab}
 - Shininess coefficient α




Adding up the Components

The University of New Mexico

For each light source and each color component, the Phong model can be written (without the distance terms) as

$$I = k_d I_d \mathbf{l} \cdot \mathbf{n} + k_s I_s (\mathbf{v} \cdot \mathbf{r})^\alpha + k_a I_a$$

For each color component we add contributions from all sources

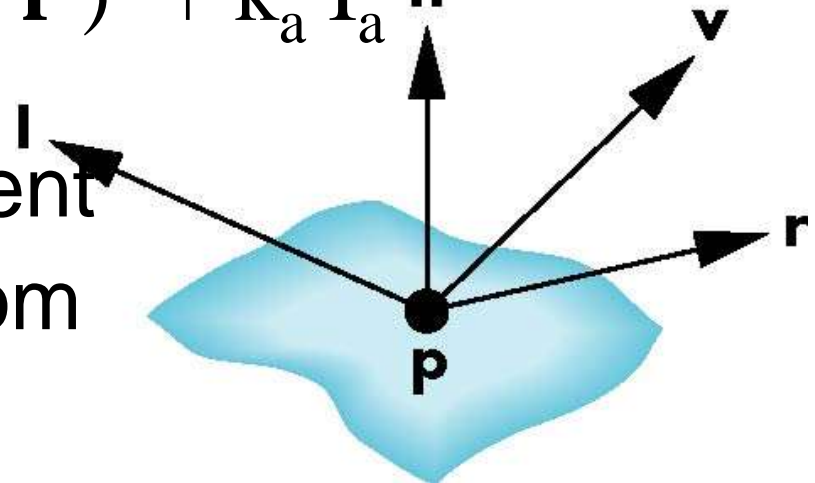



Modified Phong Model


- The specular term in the Phong model is problematic because it requires the calculation of a new reflection vector and view vector for each vertex
- Blinn suggested an approximation using the halfway vector that is more efficient



The Halfway Vector

- \mathbf{h} is normalized vector halfway between \mathbf{l} and \mathbf{v}

$$\mathbf{h} = (\mathbf{l} + \mathbf{v}) / |\mathbf{l} + \mathbf{v}|$$

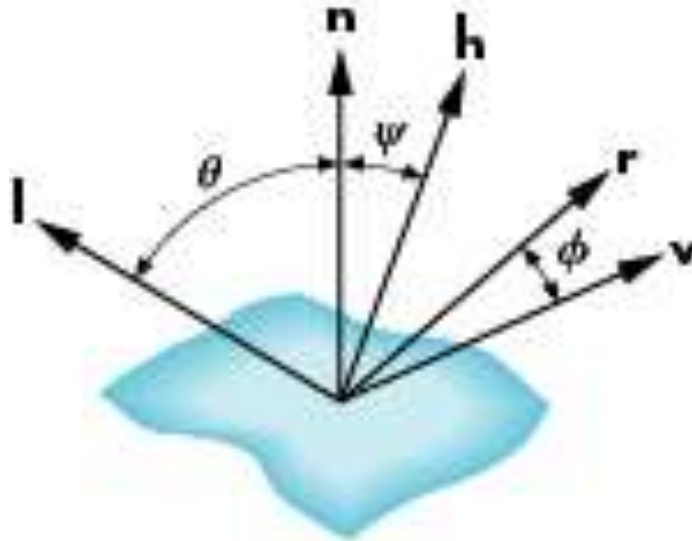




Using the halfway vector

- Replace $(\mathbf{v} \cdot \mathbf{r})^\alpha$ by $(\mathbf{n} \cdot \mathbf{h})^\beta$
- β is chosen to match shininess
- Note that halfway angle is half of angle between \mathbf{r} and \mathbf{v} if vectors are coplanar
- Resulting model is known as the modified Phong or Blinn lighting model
 - Specified in OpenGL standard



Example

Only differences in these teapots are the parameters in the modified Phong model

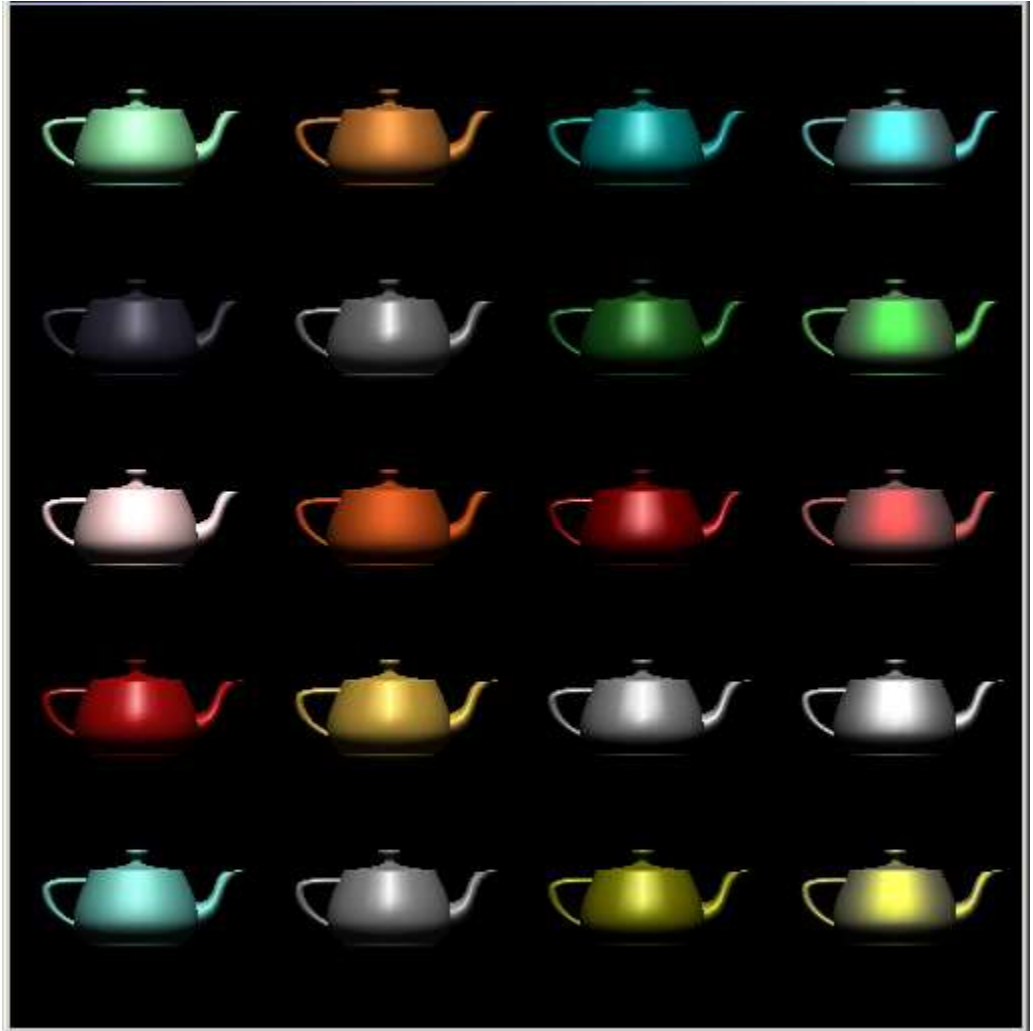



Computation of Vectors

The University of New Mexico


-
- \mathbf{l} and \mathbf{v} are specified by the application
 - Can compute \mathbf{r} from \mathbf{l} and \mathbf{n}
 - Problem is determining \mathbf{n}
 - For simple surfaces \mathbf{n} can be determined but how we determine \mathbf{n} differs depending on underlying representation of surface
 - OpenGL leaves determination of normal to application
 - Exception for GLU quadrics and Bezier surfaces was deprecated



Computing Reflection Direction

- Angle of incidence = angle of reflection
- Normal, light direction and reflection direction are coplaner
- Want all three to be unit length

$$r = 2(l \bullet n)n - l$$

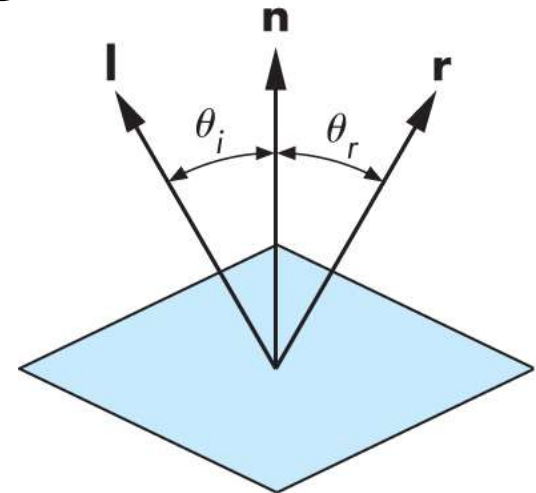




Plane Normals

- Equation of plane: $ax+by+cz+d = 0$
- From Chapter 3 we know that plane is determined by three points p_0, p_2, p_3 or normal \mathbf{n} and p_0
- Normal can be obtained by


$$\mathbf{n} = (p_2 - p_0) \times (p_1 - p_0)$$

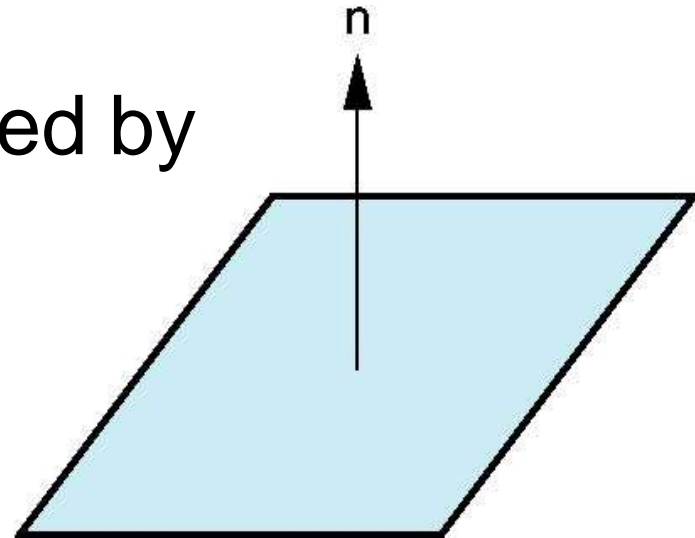



Normal to Sphere

- Implicit function $f(x,y,z)=0$
- Normal given by gradient
- Sphere $f(\mathbf{p})=\mathbf{p}\cdot\mathbf{p}-1$
- $\mathbf{n} = [\partial f/\partial x, \partial f/\partial y, \partial f/\partial z]^T = \mathbf{p}$

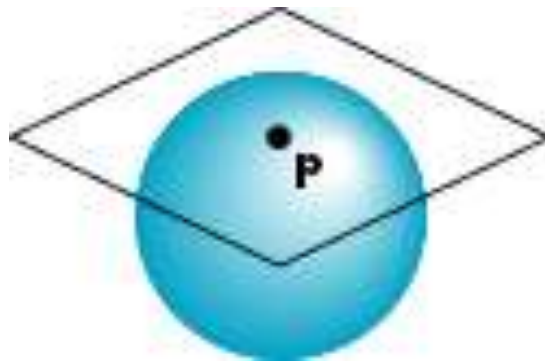




Parametric Form

- For sphere

$$x = x(u, v) = \cos u \sin v$$

$$y = y(u, v) = \cos u \cos v$$

$$z = z(u, v) = \sin u$$

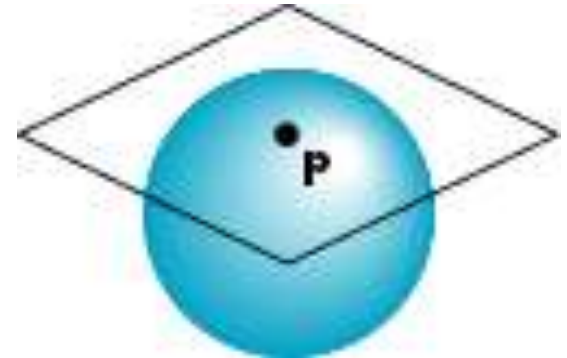

- Tangent plane determined by vectors

$$\frac{\partial \mathbf{p}}{\partial u} = \left[\frac{\partial x}{\partial u}, \frac{\partial y}{\partial u}, \frac{\partial z}{\partial u} \right]^T$$

$$\frac{\partial \mathbf{p}}{\partial v} = \left[\frac{\partial x}{\partial v}, \frac{\partial y}{\partial v}, \frac{\partial z}{\partial v} \right]^T$$

- Normal given by cross product

$$\mathbf{n} = \frac{\partial \mathbf{p}}{\partial u} \times \frac{\partial \mathbf{p}}{\partial v}$$



General Case

- We can compute parametric normals for other simple cases
 - Quadrics
 - Parameteric polynomial surfaces
 - Bezier surface patches (Chapter 10)