

SNS COLLEGE OF TECHNOLOGY

Coimbatore-35. An Autonomous Institution



Accredited by NBA – AICTE and Accredited by NAAC – UGC with 'A+' Grade Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

COURSE NAME : 19CSB201 – OPERATING SYSTEMS

II YEAR/ IV SEMESTER

UNIT – III Storage Management

Topic: Memory Management : Paging

Mrs. M. Lavanya Assistant Professor Department of Computer Science and Engineering







- Physical address space of a process can be noncontiguous; process is allocated physical memory whenever the latter is available
 - Avoids external fragmentation
 - Avoids problem of varying sized memory chunks
- Divide physical memory into fixed-sized blocks called frames
 - Size is power of 2, between 512 bytes and 16 Mbytes
- Divide logical memory into blocks of same size called pages
- Keep track of all free frames
- To run a program of size N pages, need to find N free frames and load program
- Set up a page table to translate logical to physical addresses
- Backing store likewise split into pages
- Still have Internal fragmentation



Address Translation Scheme



- Address generated by CPU is divided into:
 - Page number (p) used as an index into a page table which contains base address of each page in physical memory
 - Page offset (d) combined with base address to define the physical memory address that is sent to the memory unit


page number	page offset
р	d
m -n	n

• For given logical address space 2^m and page size 2ⁿ



Paging Hardware




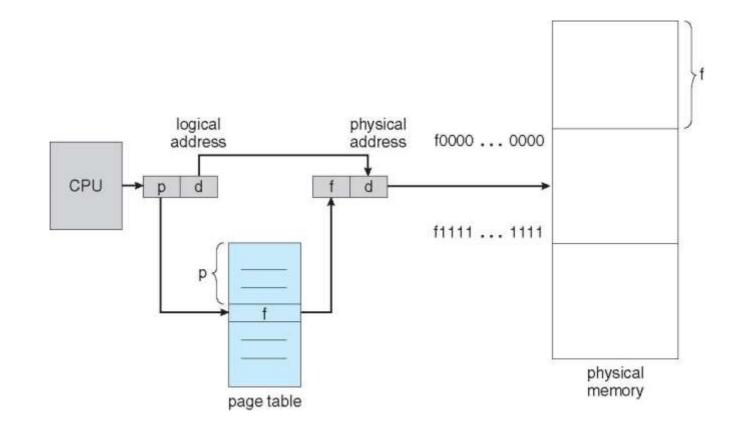



Paging Model of Logical and Physical Memory




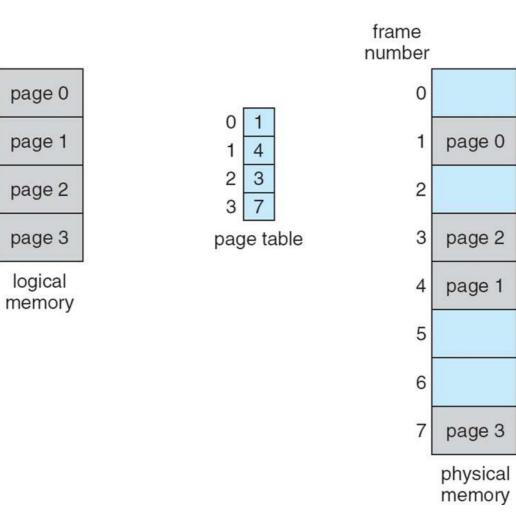



Paging Example



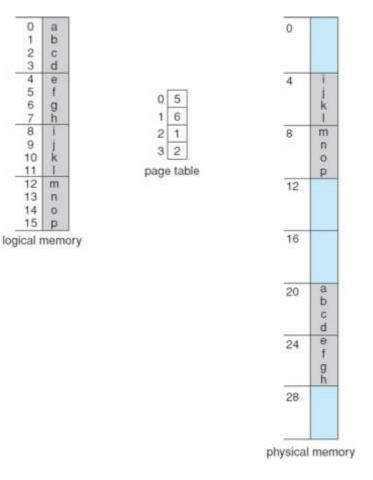

n=2 and *m*=4 32-byte memory and 4-byte pages



Paging (Cont.)




- Calculating internal fragmentation
 - Page size = 2,048 bytes
 - Process size = 72,766 bytes
 - 35 pages + 1,086 bytes
 - Internal fragmentation of 2,048 1,086 = 962 bytes
 - Worst case fragmentation = 1 frame 1 byte
 - On average fragmentation = 1 / 2 frame size
 - So small frame sizes desirable?
 - But each page table entry takes memory to track
 - Page sizes growing over time
 - Solaris supports two page sizes 8 KB and 4 MB
- Process view and physical memory now very different
- By implementation process can only access its own memory



Free Frames



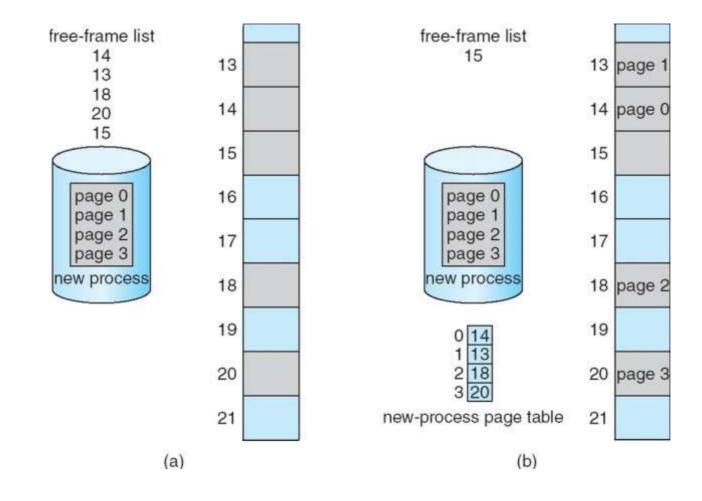

Before allocation

After allocation



Implementation of Page Table



- Page table is kept in main memory
- Page-table base register (PTBR) points to the page table
- Page-table length register (PTLR) indicates size of the page table
- In this scheme every data/instruction access requires two memory accesses
 - One for the page table and one for the data / instruction
- The two memory access problem can be solved by the use of a special fast-lookup hardware cache called associative memory or translation look-aside buffers (TLBs)



Implementation of Page Table (Cont.)



- Some TLBs store address-space identifiers (ASIDs) in each TLB entry – uniquely identifies each process to provide addressspace protection for that process
 - Otherwise need to flush at every context switch
- TLBs typically small (64 to 1,024 entries)
- On a TLB miss, value is loaded into the TLB for faster access next time
 - Replacement policies must be considered
 - Some entries can be wired down for permanent fast access



Associative Memory



• Associative memory – parallel search


Page #	Frame #

- Address translation (p, d)
 - If p is in associative register, get frame # out
 - Otherwise get frame # from page table in memory



Paging Hardware With TLB



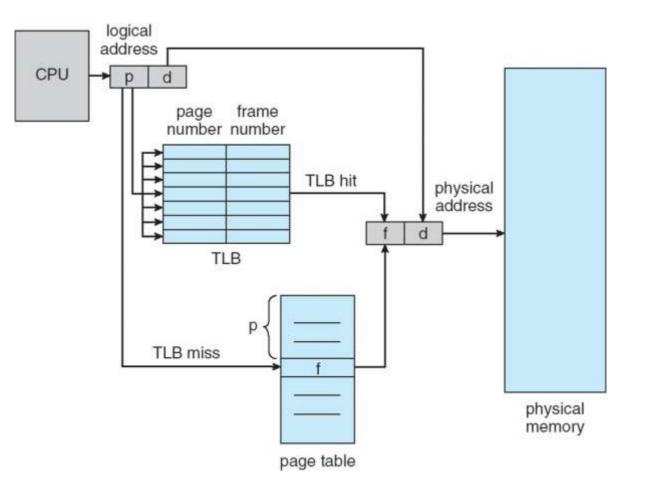



Effective Access Time



- Associative Lookup = ε time unit
 - Can be < 10% of memory access time
- Hit ratio = α
 - Hit ratio percentage of times that a page number is found in the associative registers; ratio related to number of associative registers
- Consider α = 80%, ϵ = 20ns for TLB search, 100ns for memory access
- Effective Access Time (EAT)

 $EAT = (1 + \varepsilon) \alpha + (2 + \varepsilon)(1 - \alpha)$ $= 2 + \varepsilon - \alpha$

- Consider α = 80%, ϵ = 20ns for TLB search, 100ns for memory access
 - EAT = 0.80 x 100 + 0.20 x 200 = 120ns
- Consider more realistic hit ratio -> α = 99%, ϵ = 20ns for TLB search, 100ns for memory access
 - EAT = 0.99 x 100 + 0.01 x 200 = 101ns



Memory Protection




- Memory protection implemented by associating protection bit with each frame to indicate if read-only or read-write access is allowed
 - Can also add more bits to indicate page execute-only, and so on
- Valid-invalid bit attached to each entry in the page table:
 - "valid" indicates that the associated page is in the process' logical address space, and is thus a legal page
 - "invalid" indicates that the page is not in the process' logical address space
 - Or use page-table length register (PTLR)
- Any violations result in a trap to the kernel



Valid (v) or Invalid (i) Bit In A Page Table



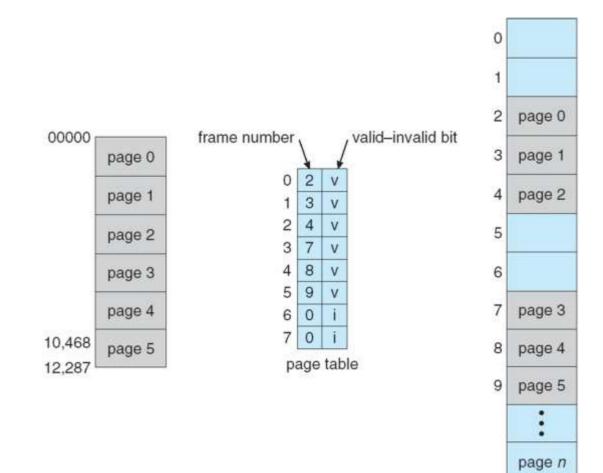



Shared Pages




Shared code

- One copy of read-only (reentrant) code shared among processes (i.e., text editors, compilers, window systems)
- Similar to multiple threads sharing the same process space
- Also useful for interprocess communication if sharing of read-write pages is allowed
- Private code and data
 - Each process keeps a separate copy of the code and data
 - The pages for the private code and data can appear anywhere in the logical address space



Shared Pages Example



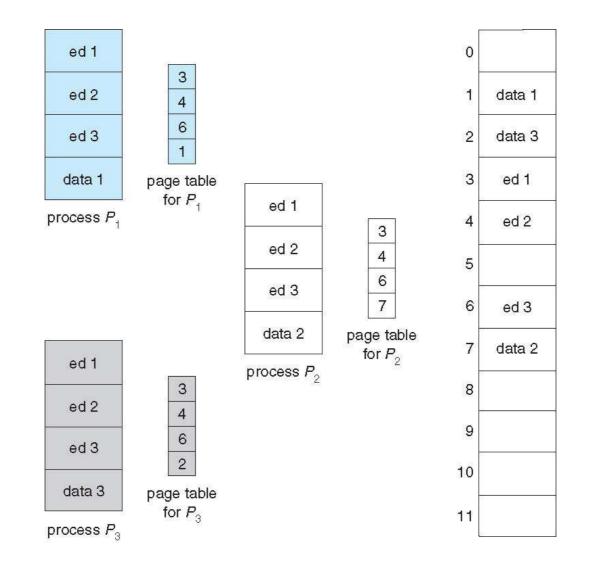







TEXT BOOKS:

- T1 Silberschatz, Galvin, and Gagne, "Operating System Concepts", Ninth Edition, Wiley India Pvt Ltd, 2009.)
- T2. Andrew S. Tanenbaum, "Modern Operating Systems", Fourth Edition, Pearson Education, 2010

REFERENCES:

- R1 Gary Nutt, "Operating Systems", Third Edition, Pearson Education, 2004.
- R2 Harvey M. Deitel, "Operating Systems", Third Edition, Pearson Education, 2004.
- R3 Abraham Silberschatz, Peter Baer Galvin and Greg Gagne, "Operating System Concepts", 9th Edition, John Wiley and Sons Inc., 2012.
- R4. William Stallings, "Operating Systems Internals and Design Principles", 7th Edition, Prentice Hall, 2011





